


TRANSPARENT LIQUID LEVEL GAUGE

Transparent Liquid Level Gauge consists of a metal body, machined to have an internal chamber and one or more front windows (on each side of the gauge).

On each window a special high resistance plate transparent glass is applied with sealing joint and metal cover plate hold by bolts and nuts.

The chamber is connected to vessel with cross fittings and flanged, threaded or welded ends. Usually, between the instrument and its connecting ends, valves are fitted to consent shut-off piping and to disassemble the level gauge without emptying the vessel. Drain valves can also be fitted to cross fittings device.

To avoid leakage in case of glass breakage, safety ball-check device can be provided in cross-fittings or shut-off valves. To protect glass surfaces from corrosive action of the process fluid, Transparent Level Gauges can be fitted with CAF, Mica shields or PTFE shields. This kind of indicator is suitable for liquids colorless and very fluid.

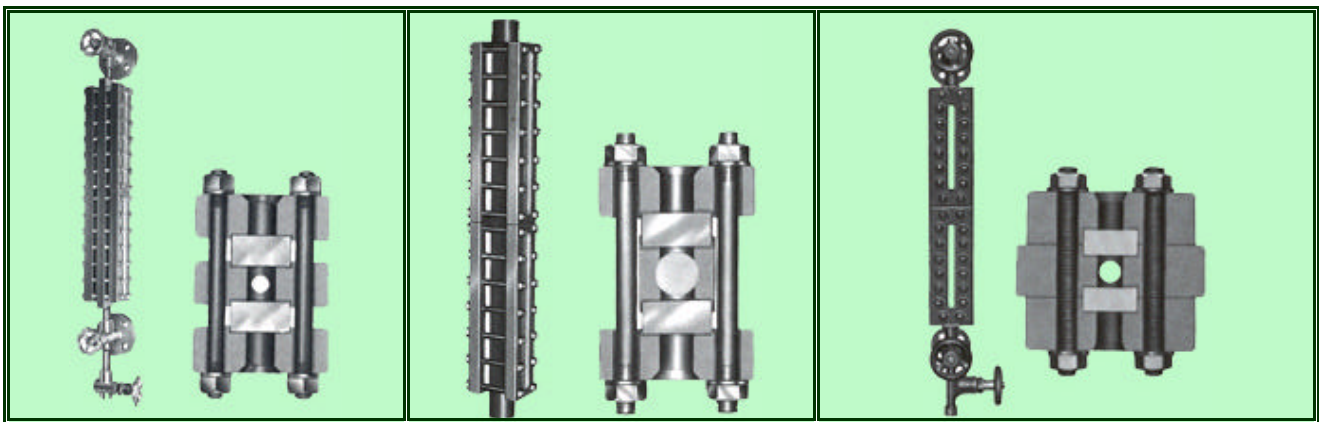

WORKING PRINCIPLE

Fluid level indication is the result of the different transparency property of the two media (i.e. liquid and air or vapour).

GENERAL SPECIFICATIONS

Model No.	TG 100
Valve body	CS/A - 105/F 304/F 316, etc.
Main Chamber	CS/SS-304/SS 316, etc.
Cover Plate	A - 105 / CS, etc.
Glass	Toughened Borosilicate - Moulded
Gasket	CAF/PTFE
Trim	SS-304/SS-316
Max. Working pressure	60 Kg/cm ²
Max. C/C Distance	2.5 MTRS.
Connection	Screwed/Flanged
Valve type	Quick closing/Plain/Auto shut off with ball check arrangement

ENQUIRY SPECIFICATIONS

C/C distance.
Service liquid
Working pressure & Temperature. Vessel Connection.
Vent & Drain Details



D. K. INSTRUMENTS PVT. LTD.

An ISO 9001:2000 Certified Company

76/2, Selimpur Road, Dhakuria, Kolkata – 700 031.

Ph. No.: 91-33-2415 1310 / 2405 0944, Fax: 91-33-2415 2311.

E-mail: dkinst@vsnl.net, Web Site: www.dkstruments.com

